

SGUVG 3000

In-Duct Double Rack Unit




UNIT C1 OYO BUSINESS PARK
CASTLE VALE
BIRMINGHAM
B35 6AN

T: 01675 430 490 W: THESPRINGFIELDGROUP.NET
E: INFO@THESPRINGFIELDGROUP.NET

- The SGUVG 3000 unit is the most powerful and efficient air sterilisation unit of its type. Ideal for high risk medical situations or exacting commercial applications.

- Performance backed by extensive scientific testing with verifiable results.

- The twin rack lamp arrangement has been positioned to create the most comprehensive microbiological destruction zone possible, with the internal reflective surfaces adding further to the unit's formidable single-pass performance.

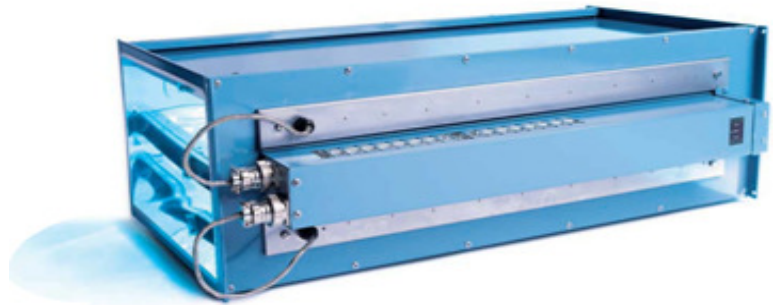

- For maximum flexibility this model is designed to allow multi-assembly of units to accommodate any given air volume or required plant position.

- Manufactured to exacting standards, the outer case is fabricated from 1.0mm thick galvanised sheet steel, epoxy polyester treated with aluminium anacoil internal liner and stainless steel lamp racks.

- The unit comes with a unique visual lamp monitoring system to facilitate easy identification and replacement of individual faulty lamps. A dedicated volt-free plug is provided to allow connection to an external monitoring circuit.

- At additional cost a remote wall mounted 'mimic' fault panel can be provided. (Interconnecting wiring will be required between unit controls and wall display).

- The whole control module is fully demountable to facilitate remote repairs and further creates an extensive access opening for ease with cleaning of internal surfaces.

- For maximum safety, automatic electrical isolation is activated when accessing the controls and lamps.

Technical details	
Dimensions W x H x L (mm)	550 x 350 x 1200
Weight	40 kg
Power input	560 Watts
Power supply (Unit provided with 2.0m flying lead only.)	220 - 240 AC / 50 Hz / 1 phase
Tube replacement	13,000 hrs maximum
Air Volume *	0.8 m ³ /s (1695 CFM) @ 35 Pa
Visual "Lamp fail" system	Included
Finish (visible-surfaces only)	Wedgewood Blue (BS 18C 37 Matt)
MRSA / C. Diff	99.99%

Important! The operation of this unit must be inter-locked with the airflow such that in the event of 'airflow failure' the unit will automatically switch off to protect the lamps.

*Maximum air volume for guaranteed performance. For air volumes greater than 0.8 use multi-assembly paired units in 0.8 m³/s increments.

For bespoke applications refer to The Springfield Group Representative.




SGUVG 3000

In-Duct Double Rack Unit



UNIT C1 OYO BUSINESS PARK
CASTLE VALE
BIRMINGHAM
B35 6AN

T: 01675 430 490 W: THESPRINGFIELDGROUP.NET
E: INFO@THESPRINGFIELDGROUP.NET

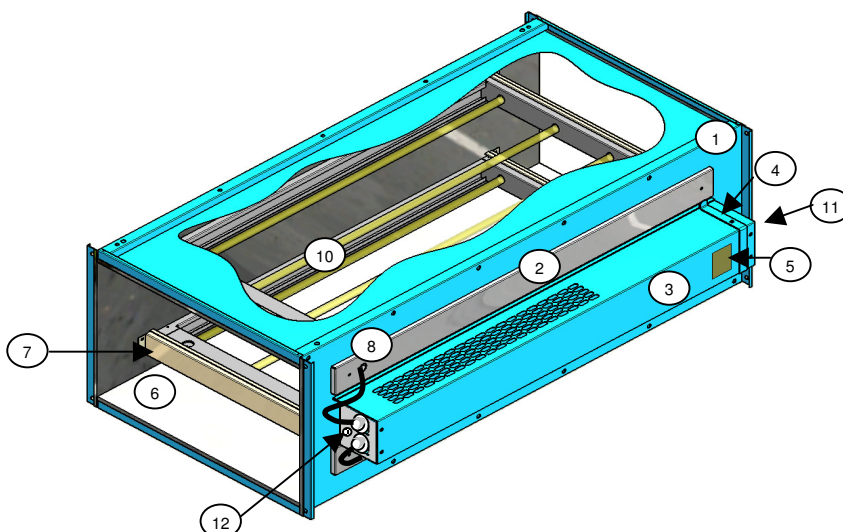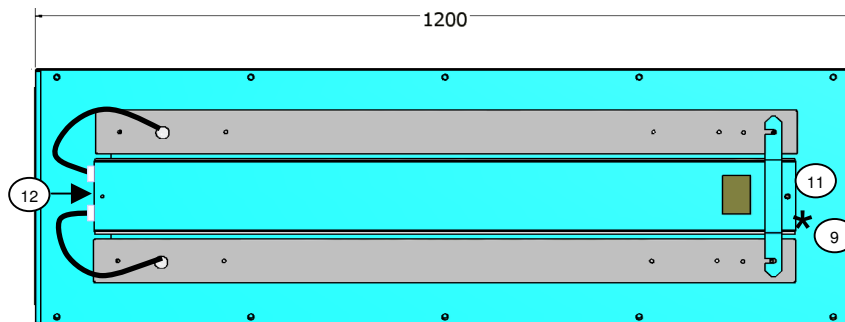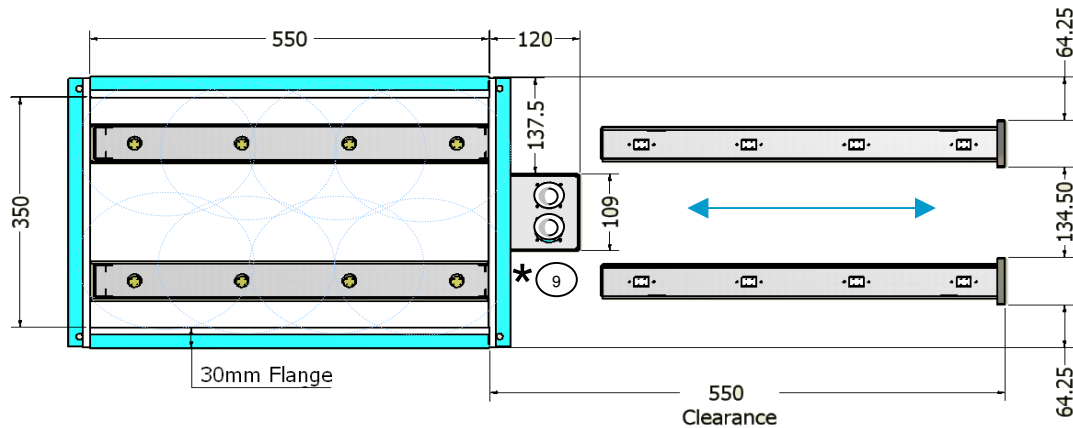

- 1) Epoxy Treated Casework
- 2) Stainless Steel Lamp Racks
(2 N° x 4 Lamp Rack)
- 3) Electrical Control Box
- 4) Fail-Safe Strap
- 5) Lamp Monitoring Panel
- 6) Anacoil Inner Liner
- 7) Rack Slide Rails
- 8) Rack Plug Connections
- 9) Power Connection
- 10) UV Lamps
- 11) Hours-Run Indicator
- 12) Volt-Free Contact For External Monitoring